

**BONECO**  
healthy air


TRADITION SINCE 1956  
 A SWISS COMPANY

# P400 MANUAL




**READ AND SAVE THESE INSTRUCTIONS**

## OVERVIEW AND PART NAMES

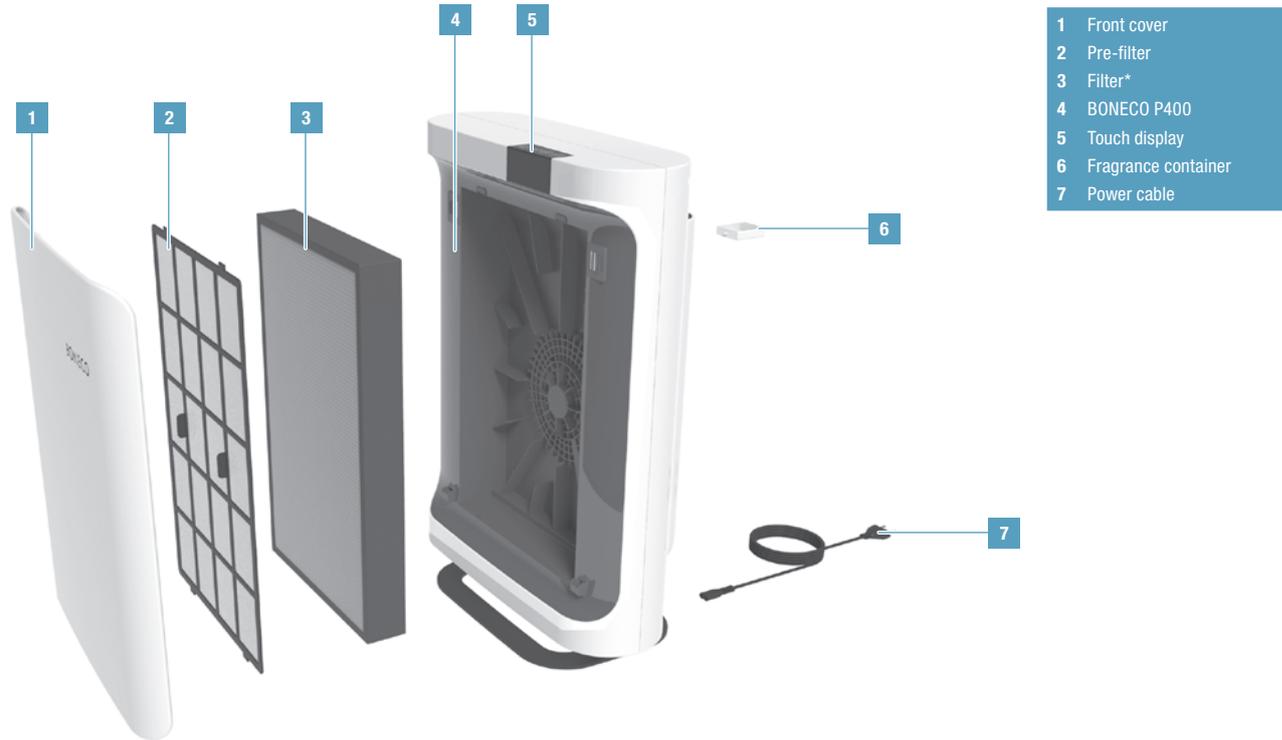


\* Depending on the model, a "BABY", "SMOG" or "ALLERGY" filter type is included in standard delivery

## PUTTING INTO OPERATION

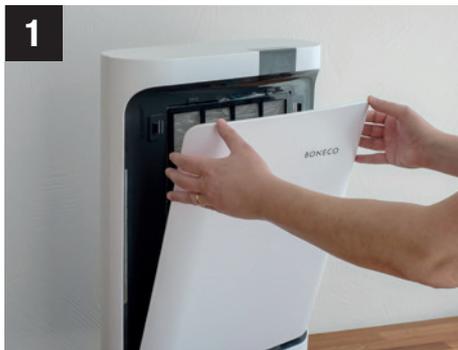**1**

Remove the magnetically attached front cover.

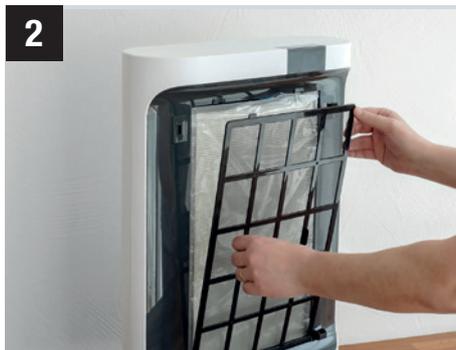**2**


Take off the pre-filter.

**3**

Take out the filter and remove the protective foil.

**4**

Insert the filter back into the holder (note the markings).

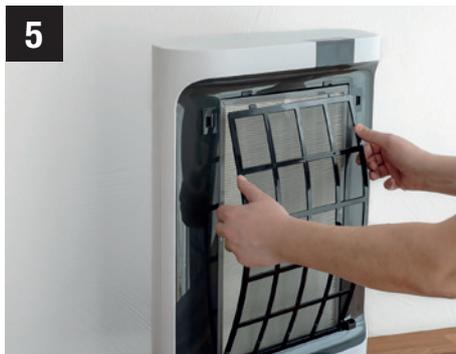**5**

Put the pre-filter back on.

**6**

Reattach the front cover.


## FRONT COVER AND FILTER TYPES

### MAGNETIC FRONT COVER

The BONECO P400 front cover is held on by magnets. The air purifier does not switch on if the front cover is missing or positioned incorrectly.

### NOTES ON THE FILTERS

Your BONECO P400 was shipped from the factory with the “ALLERGY”, “SMOG” or “BABY” filter. However, the appliance is compatible with all three filter types. The delivered filter can be replaced by another model at any time if your requirements change.

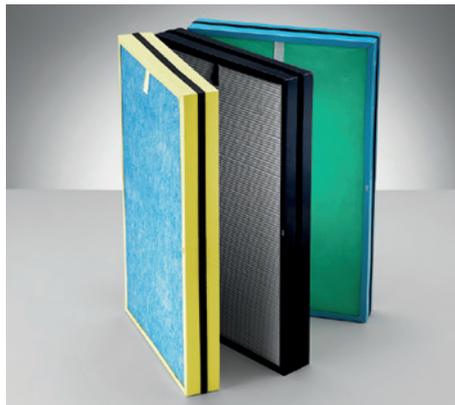

### REPLACEMENT FILTERS

You can get the replacement filters at your BONECO specialist dealer or at the online store at [www.shop.boneco.com](http://www.shop.boneco.com). The filters are identified by these labels:



## INDICATORS ON THE DISPLAY



Overview of all indicators on the display

Symbol	Meaning	
	Fan level	17
	Filter used up, replace	18

### BRIGHTNESS OF THE DISPLAY

The brightness of the display depends on the ambient light. The display is dimmed automatically if the BONECO P400 is used in a dark room (such as a bedroom).

### CLEARING THE FILTER WARNING

The  symbol does not go out automatically after the filter has been replaced. Press and hold the  button for five seconds to hide the symbol. This also resets the counter for the new filter at the same time.

## BASIC FUNCTIONS

The BONECO P400 can easily be adapted to suit your needs. Whenever you switch off the unit, all settings are saved until the next use. However, the settings are reset whenever the unit is disconnected from the power supply.

### MANUALLY CONTROLLING THE FAN LEVEL

The fan level of the BONECO P400 can be controlled manually, such as if you want the air to be thoroughly purified in the shortest possible time.

Push the  button repeatedly until the desired fan setting is achieved.

### POWER LEVEL

“Power Level” (P) can be achieved by pressing the  button. The fan is working at its maximum output under Power Level (P).

### USING FRAGRANCES

The fragrance container for adding fragrances is on the backside of the BONECO P400.

1. Briefly push on the fragrance container to unlock it and then remove the compartment.



2. Insert the fragrance into the fragrance container.
3. Push the fragrance container into the air purifier until it clicks into place.

## CLEANING AND MAINTENANCE

### REPLACING THE FILTER

The filter is worn out if the  symbol is illuminated. The filter must be replaced at this point to continue to ensure optimal air purification.

The filter must be replaced as soon as possible after the  reminder is displayed but after one year at the latest.


The procedure for replacing the filter corresponds to the figures on page 14.

1. Replace the filter in accordance with the instructions on page 14.
2. Hold the  button for 5 seconds to hide the symbol .

### CLEANING THE PRE-FILTER

The pre-filter prevents excessive dust accumulation from getting inside the BONECO P400.

1. Clean the pre-filter under running water or using a vacuum cleaner.



2. Allow the pre-filter to dry completely before re-inserting it.

## **INSTRUCTIONS D'UTILISATION DU BONECO P400**

## INSTRUCTIONS D'UTILISATION DU BONECO P400

### CHER CLIENT,

Nous vous félicitons pour l'achat du BONECO P400. Ce purificateur d'air à haute efficacité est équipé d'un triple système de filtration, qui libère l'air non seulement des odeurs mais aussi de la poussière, du pollen et des particules d'impuretés. Le filtre permet de soulager efficacement de nombreux symptômes, dont le rhume des foins et les réactions allergiques à la poussière domestique et aux déjections d'acariens.


Le BONECO P400 est conçu pour un fonctionnement entièrement automatique et sans complication. Grâce à la commande intelligente, le niveau sonore reste aussi bas que possible.

**Nous vous souhaitons beaucoup de moments heureux avec votre nouveau purificateur d'air BONECO P400 !**


### CONTENU DE LA LIVRAISON




BONECO P400 avec cordon d'alimentation spécifique au pays



Filtre «BABY», «SMOG» ou «ALLERGY»



Manuel imprimé



CD contenant des modes d'emploi en plusieurs langues

### CARACTÉRISTIQUES TECHNIQUES\*

Désignation de modèle	BONECO P400					
Tension de réseau	220–240 V, 50 Hz					
Puissance absorbée	27 W					
Niveau sonore de fonctionnement	30–58 dB(A)					
Convient pour des locaux de taille	20 m <sup>2</sup>	(filtre ALLERGY)	19 m <sup>2</sup>	(filtre BABY)	21 m <sup>2</sup>	(filtre SMOG)
	50 m <sup>3</sup>	(filtre ALLERGY)	48 m <sup>3</sup>	(filtre BABY)	53 m <sup>3</sup>	(filtre SMOG)
Puissance de purification (CADR)	230 m <sup>3</sup> /h (filtre ALLERGY)		220 m <sup>3</sup> /h (filtre BABY)		240 m <sup>3</sup> /h (filtre SMOG)	
Flux d'air	280 m <sup>3</sup> /h					
Dimensions L × l × H	224×420×562 mm					
Poids à vide	7.2 kg / 7.9 kg (avec filtre "ALLERGY")					

\* Sous réserve de modifications